


#### **OFFICIAL QUOTE**

### 1VA 110 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



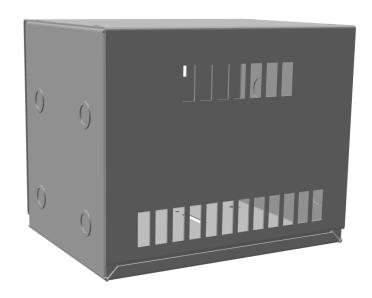

## 1VA 110 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$891.94 CAD

Single Phase Isolation Transformer with a capacity of 1kVA, transforming 110 Volts to 230/460 Volts

SKU: SC1A2-L1

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**



Single Phase Isolation Transformer with a capacity of 1kVA, transforming 110 Volts to 230/460 Volts



### **OFFICIAL QUOTE**



# 1VA 110 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS   |   |
|--------------------------|---|
| Weight                   | 35 lbs  |
| Phases                   | 1   |
| kVA                      | 1   |
| Connection               | 1Ph-1coil-3T-SU   |
| Primary Voltage          | 110   |
| Primary Max Current      | 9.09A   |
| Primary Markings         | X1-X2   |
| Primary Terminals        | #2-14 AWG   |
| Secondary Voltage        | 230/460   |
| Secondary Max Current    | 4.35A   |
| Secondary Markings       | H1-H2   |
| Secondary Terminals      | #2-14 AWG   |
| Primary Taps             | +/- 1 x 5%  |
| Conductor Material       | Copper  |
| BIL (Insulation) Level   | 10kV  |
| Efficiency (@35% Load) % | N/A   |
| Impedance Range          | 5.0 - 7.0%  |
| Sound (db)               | 40  |
| Enclosure Type           | NEMA 1  |
| Enclosure Size           | E1-0  |
| Finish/Colour            | Polyester Powder Coat – ANSI/ASA 61 Grey  |
| Certifications           | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015<br>Registered |
| Temperatue Rise          | 115°C   |



### **OFFICIAL QUOTE**



# 1VA 110 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

| Insuation Class      | 115°C                                    |
|----------------------|--|
| Country/Manufacturer | Canada/RPM                               |
| Finish               | Polyester Powder Coat – ANSI/ASA 61 Grey |