




OFFICIAL QUOTE

200KVA 440 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

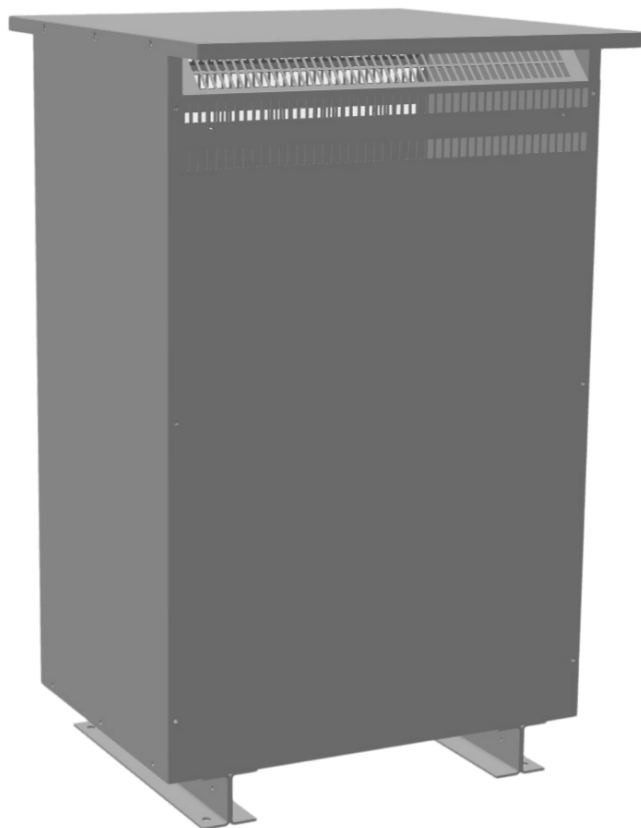

200KVA 440 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



\$18,925.37 CAD

Single Phase Isolation Transformer with a capacity of 200kVA, transforming 440 Volts to 120/240 Volts

SKU: SC200H2-K/Z3

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

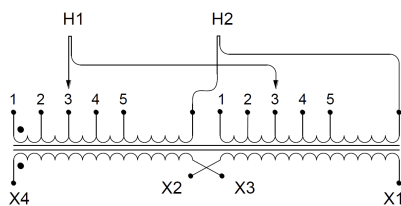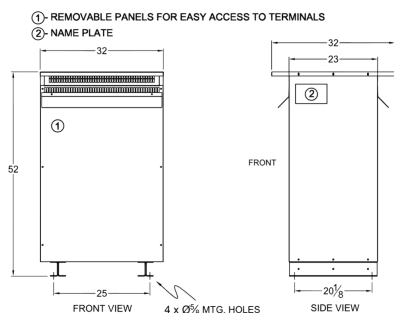

Single Phase Isolation Transformer with a capacity of 200kVA, transforming 440 Volts to 120/240 Volts



OFFICIAL QUOTE

200KVA 440 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	1170 lbs
Phases	1
kVA	200
Connection	1Ph-2coil-5t-SD
Primary Voltage	440
Primary Max Current	454.55A
Primary Markings	H1-H2
Primary Terminals	Pads
Secondary Voltage	120/240
Secondary Max Current	1666.67A
Secondary Markings	X1-X2
Secondary Terminals	Pads
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	98.74% (DOE 2016/NRCan 2019)
Impedance Range	4.0 – 6.0%
Sound (db)	55
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-9S
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE

200KVA 440 VOLTS TO 120/240
VOLTS SINGLE PHASE ISOLATION
TRANSFORMER



Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey