



OFFICIAL QUOTE

200KVA 460 VOLTS TO 347 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



200KVA 460 VOLTS TO 347 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$19,785.61 CAD

Single Phase Isolation Transformer with a capacity of 200kVA, transforming 460 Volts to 347 Volts

SKU: SC200H1-E/Z3

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

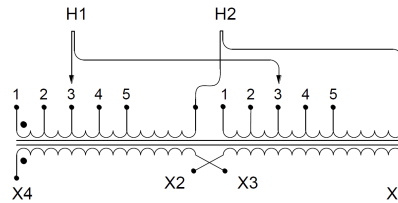

Single Phase Isolation Transformer with a capacity of 200kVA, transforming 460 Volts to 347 Volts



OFFICIAL QUOTE

200KVA 460 VOLTS TO 347 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER



PRODUCT SPECIFICATIONS

| | |
|----------------------------|--|
| Weight | 1170 lbs |
| Phases | 1 |
| kVA | 200 |
| Connection | 1Ph-2coil-5t-SD |
| Primary Voltage | 460 |
| Primary Max Current | 434.78A |
| Primary Markings | H1-H2 |
| Primary Terminals | Pads |
| Secondary Voltage | 347 |
| Secondary Max Current | 576.37A |
| Secondary Markings | X1-X2 |
| Secondary Terminals | Pads |
| Primary Taps | +/- 2 x 2.5% |
| Conductor Material | Copper |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | 98.74% (DOE 2016/NRCan 2019) |
| Impedance Range | 4.0 – 6.0% |
| Sound (db) | 55 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-9S |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | 150°C |



OFFICIAL QUOTE

200KVA 460 VOLTS TO 347 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER



| | |
|----------------------|--|
| Insuation Class | 150°C |
| Country/Manufacturer | Canada/RPM |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |