


#### **OFFICIAL QUOTE**

### 200KVA 600 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



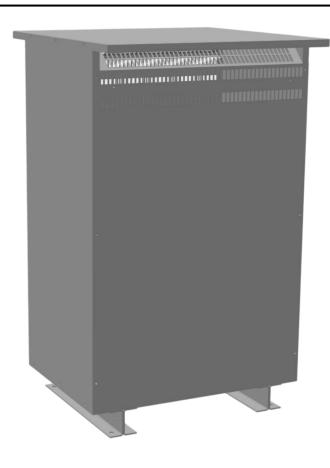

## 200KVA 600 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$18,925.37 CAD

Single Phase Isolation Transformer with a capacity of 200kVA, transforming 600 Volts to 230/460 Volts

SKU: SC200J-L1/Z3

**Categories:** <u>Isolation Transformers</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 200kVA, transforming 600 Volts to 230/460 Volts



### **OFFICIAL QUOTE**



# 200KVA 600 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	1170 lbs
Phases	1
kVA	200
Connection	1Ph-2coil-5t-SD
Primary Voltage	600
Primary Max Current	333.33A
Primary Markings	H1-H2
Primary Terminals	<u>Pads</u>
Secondary Voltage	230/460
Secondary Max Current	869.57A
Secondary Markings	<u>X1-X2</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.74% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-9S
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



### **OFFICIAL QUOTE**



# 200KVA 600 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey