


#### **OFFICIAL QUOTE**

### 250VA 380 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



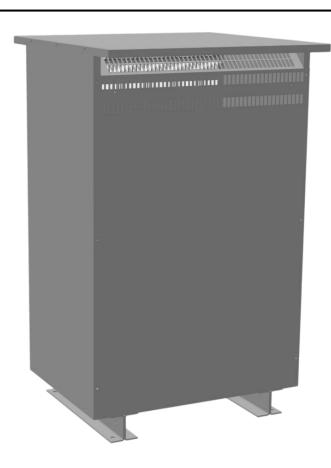

# 250VA 380 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$12,367.38 USD

Single Phase Isolation Transformer with a capacity of 250kVA, transforming 380 Volts to 115/230 Volts

SKU: SA250F-K1/Z3

**Categories:** <u>Isolation Transformers</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 250kVA, transforming 380 Volts to 115/230 Volts



#### **OFFICIAL QUOTE**



# 250VA 380 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS		
Weight	1225 lbs	
Phases	1	
kVA	250	
Connection	1Ph-2coil-5t-SD	
Primary Voltage	380	
Primary Max Current	657.89A	
Primary Markings	<u>H1-H2</u>	
Primary Terminals	<u>Pads</u>	
Secondary Voltage	115/230	
Secondary Max Current	2173.91A	
Secondary Markings	<u>X1-X2</u>	
Secondary Terminals	<u>Pads</u>	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	<u>Aluminum</u>	
BIL (Insulation) Level	<u>10kV</u>	
Efficiency (@35% Load) %	98.80% (DOE 2016/NRCan 2019)	
Impedance Range	4.0 - 6.0%	
Sound (db)	<u>55</u>	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	E3R-9S	
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	
Temperatue Rise	<u>150°C</u>	



#### **OFFICIAL QUOTE**



## 250VA 380 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey