




**25KVA 230 VOLTS TO 240/480 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER**

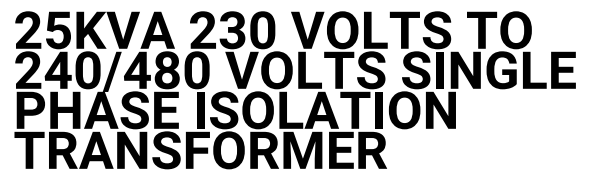


Single Phase Isolation Transformer with a capacity of 25kVA, transforming 230 Volts to 240/480 Volts

Categories: [Isolation Transformers](#)

① - REMOVABLE PANELS FOR EASY ACCESS TO TERMINALS

FRONT VIEW

SIDE VIEW

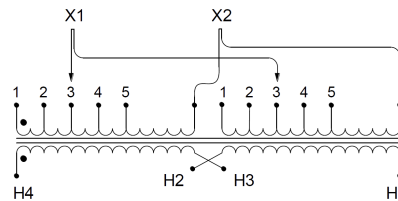

The quote is valid 30 days from 13 March 2026. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



OFFICIAL QUOTE

25KVA 230 VOLTS TO 240/480 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	225 lbs
Phases	1
kVA	25
Connection	1Ph-2coil-5T-SU
Primary Voltage	230
Primary Max Current	108.7A
Primary Markings	X1-X2
Primary Terminals	Pads
Secondary Voltage	240/480
Secondary Max Current	104.17A
Secondary Markings	H1-H2
Secondary Terminals	Pads
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	98.00% (DOE 2016/NRCan 2019)
Impedance Range	4.0 – 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE

25KVA 230 VOLTS TO 240/480 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey