



OFFICIAL QUOTE

2KVA 200 VOLTS TO 220/440 VOLTS  
SINGLE PHASE ISOLATION  
TRANSFORMER



2KVA 200 VOLTS TO  
220/440 VOLTS SINGLE  
PHASE ISOLATION  
TRANSFORMER


**\$1,163.86 CAD**

Single Phase Isolation Transformer with a capacity of 2kVA, transforming 200 Volts to 220/440 Volts

SKU: SC2B1-L2

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

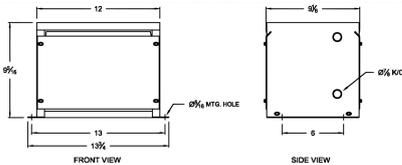

Single Phase Isolation Transformer with a capacity of 2kVA, transforming 200 Volts to 220/440 Volts



OFFICIAL QUOTE

2KVA 200 VOLTS TO 220/440 VOLTS  
SINGLE PHASE ISOLATION  
TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	50 lbs
Phases	<a href="#">1</a>
kVA	<a href="#">2</a>
Connection	<a href="#">1Ph-1coil-3T-SU</a>
Primary Voltage	<a href="#">200</a>
Primary Max Current	<a href="#">10.0A</a>
Primary Markings	<a href="#">X1-X2</a>
Primary Terminals	<a href="#">#2-14 AWG</a>
Secondary Voltage	<a href="#">220/440</a>
Secondary Max Current	<a href="#">9.09A</a>
Secondary Markings	<a href="#">H1-H2</a>
Secondary Terminals	<a href="#">#2-14 AWG</a>
Primary Taps	<a href="#">+/- 1 x 5%</a>
Conductor Material	<a href="#">Copper</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">5.0 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">NEMA 1</a>
Enclosure Size	<a href="#">E1-1</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Temperatue Rise	<a href="#">115°C</a>



OFFICIAL QUOTE

2KVA 200 VOLTS TO 220/440 VOLTS  
SINGLE PHASE ISOLATION  
TRANSFORMER



Insuation Class	<a href="#">115°C</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>