


OFFICIAL QUOTE

2VA 440 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



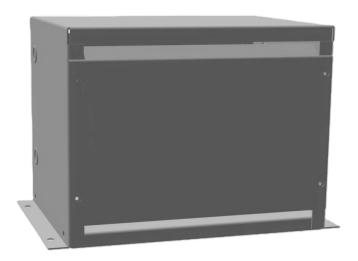

2VA 440 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$984.81 CAD

Single Phase Isolation Transformer with a capacity of 2kVA, transforming 440 Volts to 120/240 Volts

SKU: SC2H2-K

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 2kVA, transforming 440 Volts to 120/240 Volts



OFFICIAL QUOTE



2VA 440 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | | |
|----------------------------|--|--|
| Weight | 50 lbs | |
| Phases | 1 | |
| kVA | 2 | |
| Connection | 1Ph-1coil-3T-SD | |
| Primary Voltage | 440 | |
| Primary Max Current | 4.55A | |
| Primary Markings | H1-H2 | |
| Primary Terminals | #2-14 AWG | |
| Secondary Voltage | 120/240 | |
| Secondary Max Current | 16.67A | |
| Secondary Markings | <u>X1-X2</u> | |
| Secondary Terminals | #2-14 AWG | |
| Primary Taps | +/- 1 x 5% | |
| Conductor Material | Copper | |
| BIL (Insulation) Level | <u>10kV</u> | |
| Efficiency (@35% Load) % | N/A | |
| Impedance Range | <u>5.0 - 7.0%</u> | |
| Sound (db) | 40 | |
| Enclosure Type | NEMA 1 | |
| Enclosure Size | <u>E1-1</u> | |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey | |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered | |
| Temperatue Rise | 115°C | |



OFFICIAL QUOTE



2VA 440 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

| Insuation Class | <u>115°C</u> |
|----------------------|--|
| Country/Manufacturer | Canada/RPM |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |