


OFFICIAL QUOTE

30VA 460 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER



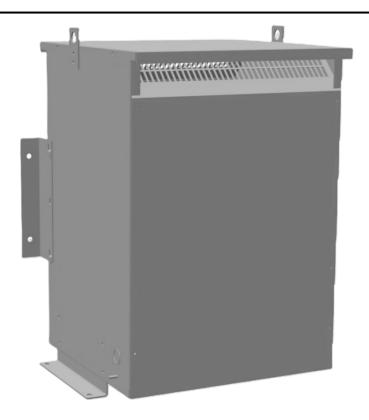

30VA 460 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$5,550.72 CAD


Three Phase Isolation Transformer with a capacity of 30kVA, transforming 460 Volts to 380Y/220 Volts

SKU: BC30H1-R/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 30kVA, transforming 460 Volts to 380Y/220 Volts



OFFICIAL QUOTE



30VA 460 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	308 lbs
Phases	<u>3</u>
kVA	30
Connection	3Ph-DY-5T-SD
Primary Voltage	460
Primary Max Current	37.65A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	380Y/220
Secondary Max Current	<u>45.58A</u>
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	<u>+/- 2 x 2.5%</u>
Conductor Material	<u>Copper</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.23% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



30VA 460 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey