




OFFICIAL QUOTE

330KVA 200 VOLTS TO 240/480 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

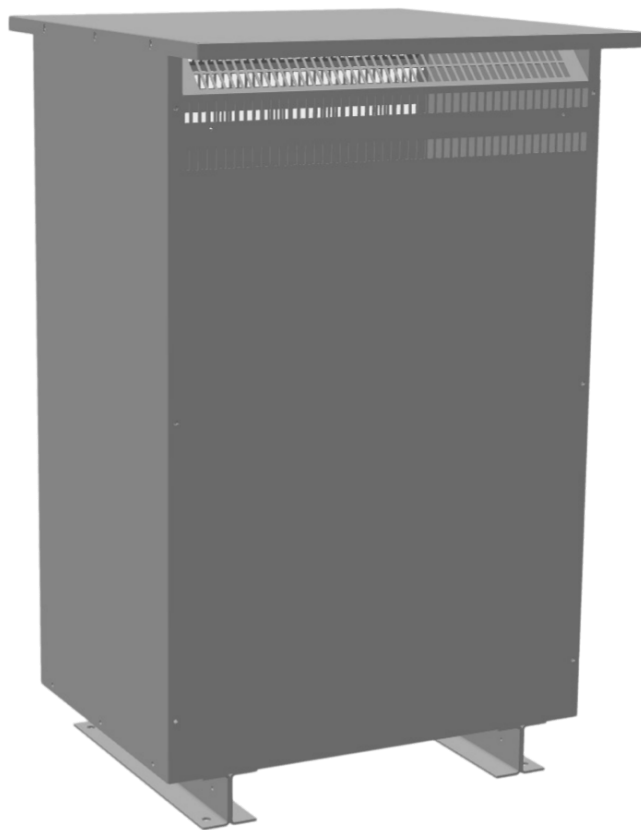

330KVA 200 VOLTS TO 240/480 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



\$20,962.76 CAD

Single Phase Isolation Transformer with a capacity of 330kVA, transforming 200 Volts to 240/480 Volts

SKU: SA330B1-L/Z3

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

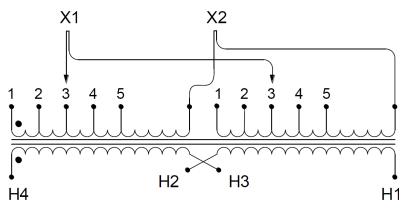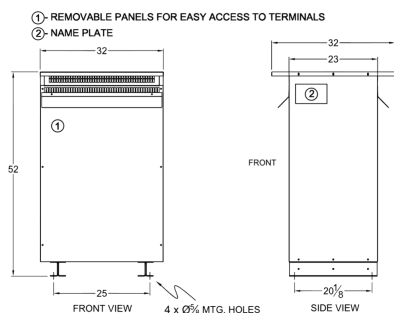

Single Phase Isolation Transformer with a capacity of 330kVA, transforming 200 Volts to 240/480 Volts



OFFICIAL QUOTE

330KVA 200 VOLTS TO 240/480 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	1550 lbs
Phases	1
kVA	330
Connection	1Ph-2coil-5T-SU
Primary Voltage	200
Primary Max Current	1650.0A
Primary Markings	X1-X2
Primary Terminals	Pads
Secondary Voltage	240/480
Secondary Max Current	1375.0A
Secondary Markings	H1-H2
Secondary Terminals	Pads
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	98.90% (DOE 2016/NRCan 2019)
Impedance Range	4.0 – 6.0%
Sound (db)	55
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-9S
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE

**330KVA 200 VOLTS TO 240/480
VOLTS SINGLE PHASE ISOLATION
TRANSFORMER**



Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey