


OFFICIAL QUOTE

330KVA 220 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



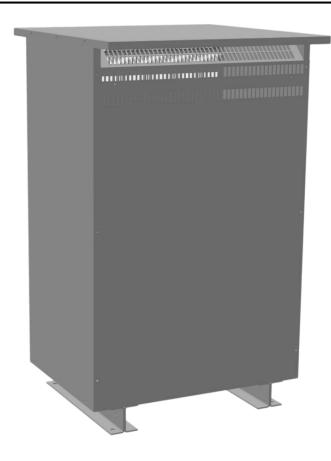

330KVA 220 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$18,829.27 CAD


Single Phase Isolation Transformer with a capacity of 330kVA, transforming 220 Volts to 230/460 Volts

SKU: SA330C2-L1/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 330kVA, transforming 220 Volts to 230/460 Volts



OFFICIAL QUOTE



330KVA 220 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	1550 lbs
Phases	1
kVA	330
Connection	1Ph-2coil-5T-SU
Primary Voltage	220
Primary Max Current	1500.0A
Primary Markings	<u>X1-X2</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	230/460
Secondary Max Current	1434.78A
Secondary Markings	H1-H2
Secondary Terminals	<u>Pads</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.90% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-9S
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



330KVA 220 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	<u>150°C</u>	-
Country/Manufacturer	Canada/RPM	
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	