

**3KVA 200 VOLTS TO 220/440 VOLTS  
SINGLE PHASE ISOLATION  
TRANSFORMER**



**3KVA 200 VOLTS TO  
220/440 VOLTS SINGLE  
PHASE ISOLATION  
TRANSFORMER**


**\$1,361.46 CAD**

Single Phase Isolation Transformer with a capacity of 3kVA, transforming 200 Volts to 220/440 Volts

**SKU:** SC3B1-L2

**Categories:** [Isolation Transformers](#)

**SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**

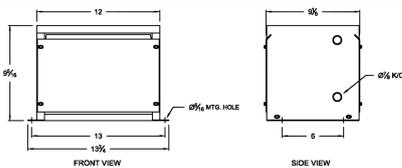

Single Phase Isolation Transformer with a capacity of 3kVA, transforming 200 Volts to 220/440 Volts

3KVA 200 VOLTS TO 220/440 VOLTS  
SINGLE PHASE ISOLATION  
TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	50 lbs
Phases	<a href="#">1</a>
kVA	<a href="#">3</a>
Connection	<a href="#">1Ph-1coil-3T-SU</a>
Primary Voltage	<a href="#">200</a>
Primary Max Current	<a href="#">15.0A</a>
Primary Markings	<a href="#">X1-X2</a>
Primary Terminals	<a href="#">#2-14 AWG</a>
Secondary Voltage	<a href="#">220/440</a>
Secondary Max Current	<a href="#">13.64A</a>
Secondary Markings	<a href="#">H1-H2</a>
Secondary Terminals	<a href="#">#2-14 AWG</a>
Primary Taps	<a href="#">+/- 1 x 5%</a>
Conductor Material	<a href="#">Copper</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">5.0 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">NEMA 1</a>
Enclosure Size	<a href="#">E1-1</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Temperatue Rise	<a href="#">115°C</a>



OFFICIAL QUOTE

3KVA 200 VOLTS TO 220/440 VOLTS  
SINGLE PHASE ISOLATION  
TRANSFORMER



Insuation Class	<a href="#">115°C</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>