




OFFICIAL QUOTE

3KVA 380 VOLTS TO 440Y/254 VOLTS THREE PHASE ISOLATION TRANSFORMER

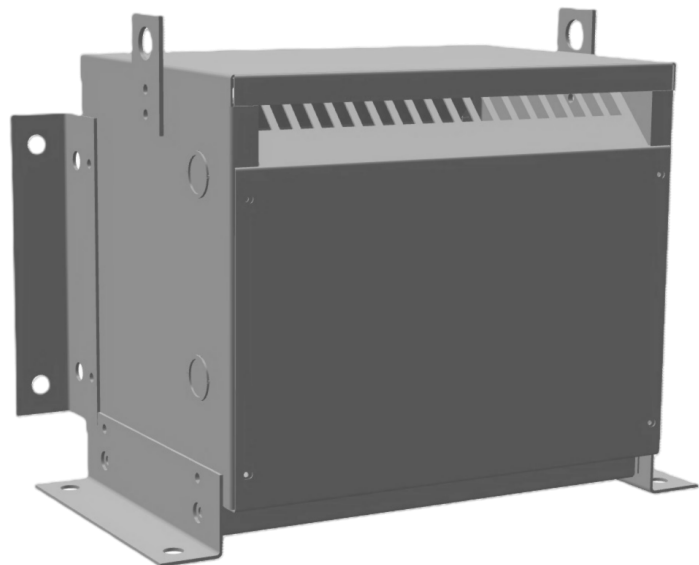

3KVA 380 VOLTS TO 440Y/254 VOLTS THREE PHASE ISOLATION TRANSFORMER



\$1,618.75 CAD

Three Phase Isolation Transformer with a capacity of 3kVA, transforming 380 Volts to 440Y/254 Volts

SKU: BC3F-P2

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

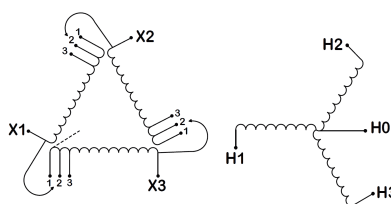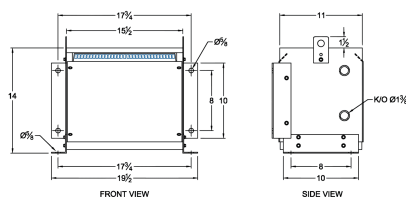

Three Phase Isolation Transformer with a capacity of 3kVA, transforming 380 Volts to 440Y/254 Volts



OFFICIAL QUOTE

3KVA 380 VOLTS TO 440Y/254 VOLTS THREE PHASE ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	73 lbs
Phases	3
kVA	3
Connection	3Ph-DY-3T-SU
Primary Voltage	380
Primary Max Current	4.56A
Primary Markings	X1-X2-X3
Primary Terminals	#2-14 AWG
Secondary Voltage	440Y/254
Secondary Max Current	3.94A
Secondary Markings	H0-H1-H2-H3
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-3
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	115°C



OFFICIAL QUOTE

3KVA 380 VOLTS TO 440Y/254 VOLTS
THREE PHASE ISOLATION
TRANSFORMER



Insuation Class	115°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey