


#### **OFFICIAL QUOTE**

# 3KVA 460 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER



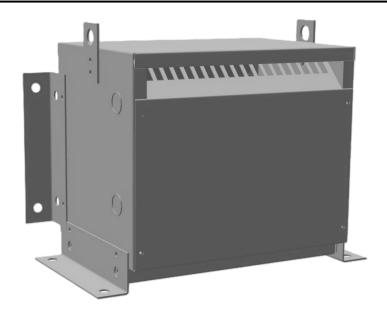

## 3KVA 460 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$1,463.00 CAD


Three Phase Isolation Transformer with a capacity of 3kVA, transforming 460 Volts to 240Y/139 Volts

SKU: BC3H1-S

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Isolation Transformer with a capacity of 3kVA, transforming 460 Volts to 240Y/139 Volts



### **OFFICIAL QUOTE**



# 3KVA 460 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	73 lbs
Phases	<u>3</u>
kVA	<u>3</u>
Connection	3Ph-DY-3T-SD
Primary Voltage	460
Primary Max Current	3.77A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	240Y/139
Secondary Max Current	7.22A
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	<u>5.0 - 7.0%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-3
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	<u>115°C</u>



### **OFFICIAL QUOTE**



### 3KVA 460 VOLTS TO 240Y/139 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	115°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey