


OFFICIAL QUOTE

450KVA 220 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER



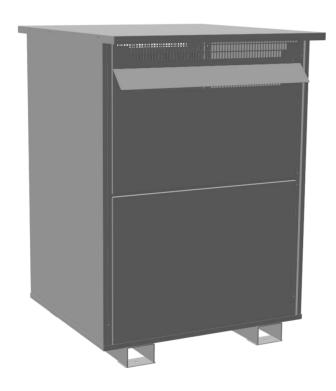

450KVA 220 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

\$37,731.96 CAD


Three Phase Isolation Transformer with a capacity of 450kVA, transforming 220 Volts to 480Y/277 Volts

SKU: BA450C2-P/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 450kVA, transforming 220 Volts to 480Y/277 Volts



OFFICIAL QUOTE



450KVA 220 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

RODUCT SPECIFICATIONS		
Weight	3640 lbs	
Phases	3	
kVA	450	
Connection	3Ph-DY-5CT-SU	
Primary Voltage	220	
Primary Max Current	1180.94A	
Primary Markings	<u>X1-X2-X3</u>	
Primary Terminals	<u>Pads</u>	
Secondary Voltage	480Y/277	
Secondary Max Current	541.27A	
Secondary Markings	<u>H0-H1-H2-H3</u>	
Secondary Terminals	<u>Pads</u>	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	Aluminum	
BIL (Insulation) Level	<u>10kV</u>	
Efficiency (@35% Load) %	99.11% (DOE 2016/NRCan 2019)	
Impedance Range	4.0 - 6.0%	
Sound (db)	60	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	E3R-10	
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	
Temperatue Rise	150°C	



OFFICIAL QUOTE



450KVA 220 VOLTS TO 480Y/277 VOLTS THREE PHASE ISOLATION TRANSFORMER

-	Insuation Class	<u>150°C</u>
	Country/Manufacturer	Canada/RPM
	Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey