


### **OFFICIAL QUOTE**

# 450KVA 380 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER



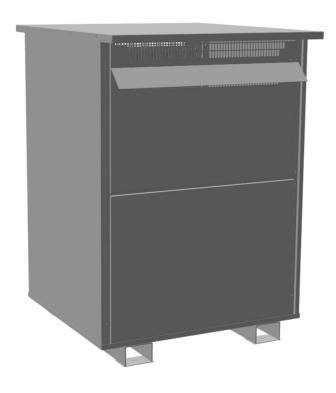

# 450KVA 380 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$37,731.96 CAD


Three Phase Isolation Transformer with a capacity of 450kVA, transforming 380 Volts to 600Y/347 Volts

**SKU:** BA450F-Q/Z3

**Categories:** <u>Isolation Transformers</u>

### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Isolation Transformer with a capacity of 450kVA, transforming 380 Volts to 600Y/347 Volts



## **OFFICIAL QUOTE**



# 450KVA 380 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER

## **PRODUCT SPECIFICATIONS**

Weight	3640 lbs
Phases	<u>3</u>
kVA	450
Connection	3Ph-DY-5CT-SU
Primary Voltage	380
Primary Max Current	683.7A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	600Y/347
Secondary Max Current	433.01A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	<u>Aluminum</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	99.11% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-10
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



## **OFFICIAL QUOTE**



# 450KVA 380 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	<u>150°C</u>	-
Country/Manufacturer	Canada/RPM	
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	