


#### **OFFICIAL QUOTE**

### 45VA 600 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER



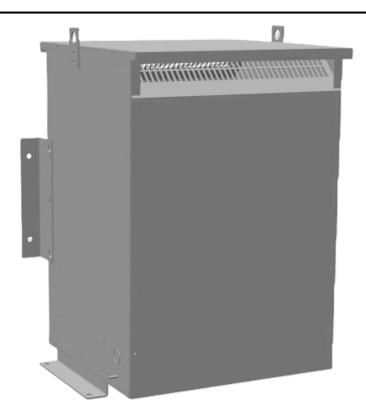

### 45VA 600 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$6,478.55 CAD


Three Phase Isolation Transformer with a capacity of 45kVA, transforming 600 Volts to 415Y/240 Volts

**SKU:** BC45J-N2/Z3

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Isolation Transformer with a capacity of 45kVA, transforming 600 Volts to 415Y/240 Volts



#### **OFFICIAL QUOTE**



# 45VA 600 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS		
Weight	397 lbs	
Phases	3	
kVA	45	
Connection	3Ph-DY-5T-SD	
Primary Voltage	600	
Primary Max Current	43.3A	
Primary Markings	H1-H2-H3	
Primary Terminals	#2-14 AWG	
Secondary Voltage	415Y/240	
Secondary Max Current	62.6A	
Secondary Markings	X0-X1-X2-X3	
Secondary Terminals	#2-14 AWG	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	Copper	
BIL (Insulation) Level	10kV	
Efficiency (@35% Load) %	98.40% (DOE 2016/NRCan 2019)	
Impedance Range	4.0 - 6.0%	
Sound (db)	45	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	E3R-6	
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	
Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	
Temperatue Rise	150°C	



#### **OFFICIAL QUOTE**



# 45VA 600 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish	Polyester Powder Coat – ANSI/ASA 61 Grey