


#### **OFFICIAL QUOTE**

## 50KVA 416 VOLTS TO 240/480 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



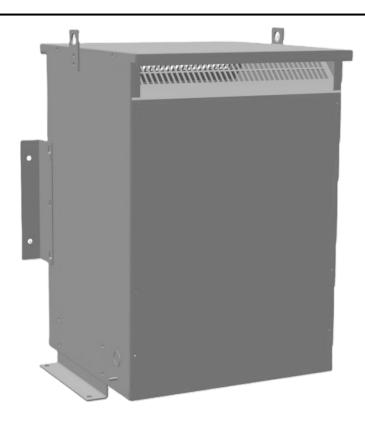

# 50KVA 416 VOLTS TO 240/480 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$4,113.65 CAD

Single Phase Isolation Transformer with a capacity of 50kVA, transforming 416 Volts to 240/480 Volts

SKU: SA50G-L/Z3

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Isolation Transformer with a capacity of 50kVA, transforming 416 Volts to 240/480 Volts



## **OFFICIAL QUOTE**



# 50KVA 416 VOLTS TO 240/480 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	308 lbs
Phases	1
kVA	<u>50</u>
Connection	1Ph-2coil-5t-SD
Primary Voltage	416
Primary Max Current	120.19A
Primary Markings	H1-H2
Primary Terminals	<u>300 MCM - 6</u>
Secondary Voltage	240/480
Secondary Max Current	208.33A
Secondary Markings	<u>X1-X2</u>
Secondary Terminals	300 MCM - 6
Primary Taps	+/- 2 x 2.5%
Conductor Material	<u>Aluminum</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.30% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



## **OFFICIAL QUOTE**



# 50KVA 416 VOLTS TO 240/480 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey