




**7.5KVA 200 VOLTS TO 230/460 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER**

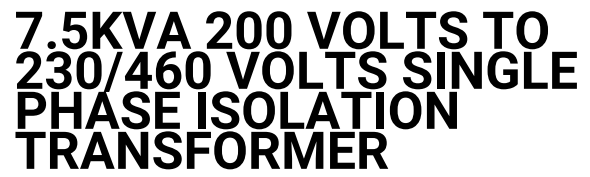

Single Phase Isolation Transformer with a capacity of 7.5kVA, transforming 200 Volts to 230/460 Volts

Categories: [Isolation Transformers](#)

The quote is valid 30 days from 15 March 2026. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



OFFICIAL QUOTE

7.5KVA 200 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	128 lbs
Phases	1
kVA	7.5
Connection	1Ph-1coil-3T-SU
Primary Voltage	200
Primary Max Current	37.5A
Primary Markings	X1-X2
Primary Terminals	#2-14 AWG
Secondary Voltage	230/460
Secondary Max Current	32.61A
Secondary Markings	H1-H2
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-4
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE

7.5KVA 200 VOLTS TO 230/460 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER



Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey