



7.5KVA 440 VOLTS TO 230/460 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$1,914.53 CAD

Single Phase Isolation Transformer with a capacity of 7.5kVA, transforming 440 Volts to 230/460 Volts

SKU: SC7H2-L1

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

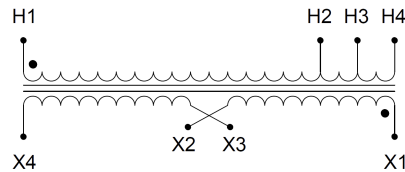

Single Phase Isolation Transformer with a capacity of 7.5kVA, transforming 440 Volts to 230/460 Volts

7.5KVA 440 VOLTS TO 230/460 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	128 lbs
Phases	1
kVA	7.5
Connection	1Ph-1coil-3T-SD
Primary Voltage	440
Primary Max Current	17.05A
Primary Markings	H1-H2
Primary Terminals	#2-14 AWG
Secondary Voltage	230/460
Secondary Max Current	32.61A
Secondary Markings	X1-X2
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-4
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE

7.5KVA 440 VOLTS TO 230/460 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER



Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey