


OFFICIAL QUOTE

75KVA 110 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER



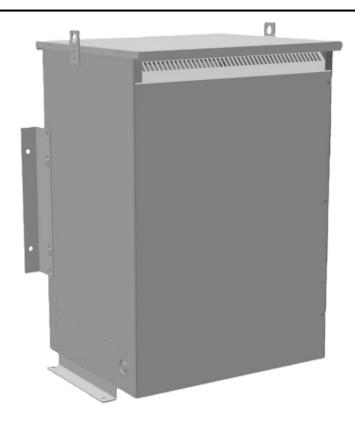

75KVA 110 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$9,017.93 CAD

Three Phase Isolation Transformer with a capacity of 75kVA, transforming 110 Volts to 600Y/347 Volts

SKU: BC75A2-Q/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 75kVA, transforming 110 Volts to 600Y/347 Volts



OFFICIAL QUOTE



75KVA 110 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS		
Weight	580 lbs	
Phases	3	
kVA	<u>75</u>	
Connection	3Ph-DY-5T-SU	
Primary Voltage	110	
Primary Max Current	393.65A	
Primary Markings	<u>X1-X2-X3</u>	
Primary Terminals	<u>Pads</u>	
Secondary Voltage	600Y/347	
Secondary Max Current	72.17A	
Secondary Markings	<u>H0-H1-H2-H3</u>	
Secondary Terminals	<u>Pads</u>	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	Copper	
BIL (Insulation) Level	10kV	
Efficiency (@35% Load) %	98.50% (DOE 2016/NRCan 2019)	
Impedance Range	4.0 - 6.0%	
Sound (db)	<u>50</u>	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	E3R-7	
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	
Temperatue Rise	150°C	



OFFICIAL QUOTE



75KVA 110 VOLTS TO 600Y/347 VOLTS THREE PHASE ISOLATION TRANSFORMER

In	suation Class	<u>150°C</u>
Co	ountry/Manufacturer	Canada/RPM
Fi	nish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey