


#### **OFFICIAL QUOTE**

### 75KVA 115 VOLTS TO 416 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



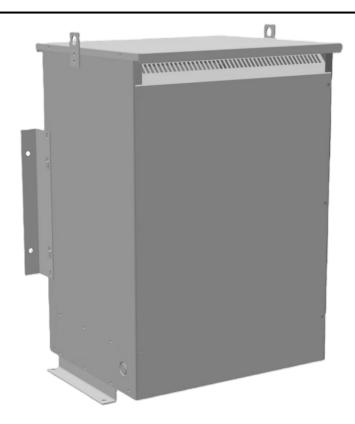

# 75KVA 115 VOLTS TO 416 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$8,036.78 CAD


Single Phase Isolation Transformer with a capacity of 75kVA, transforming 115 Volts to 416 Volts

**SKU:** SC75A1-G/Z3

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Isolation Transformer with a capacity of 75kVA, transforming 115 Volts to 416 Volts



### **OFFICIAL QUOTE**



# 75KVA 115 VOLTS TO 416 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS		
Weight	444 lbs	
Phases	1	
kVA	<u>75</u>	
Connection	1Ph-2coil-5T-SU	
Primary Voltage	115	
Primary Max Current	652.17A	
Primary Markings	<u>X1-X2</u>	
Primary Terminals	Pads	
Secondary Voltage	416	
Secondary Max Current	180.29A	
Secondary Markings	H1-H2	
Secondary Terminals	<u>Pads</u>	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	<u>Copper</u>	
BIL (Insulation) Level	<u>10kV</u>	
Efficiency (@35% Load) %	98.50% (DOE 2016/NRCan 2019)	
Impedance Range	4.0 - 6.0%	
Sound (db)	<u>50</u>	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	E3R-7	
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	
Temperatue Rise	150°C	



### **OFFICIAL QUOTE**



# 75KVA 115 VOLTS TO 416 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

-	Insuation Class	150°C
	Country/Manufacturer	Canada/RPM
	Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey