



OFFICIAL QUOTE

75KVA 440 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



75KVA 440 VOLTS TO 115/230 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$5,795.30 CAD

Single Phase Isolation Transformer with a capacity of 75kVA, transforming 440 Volts to 115/230 Volts

SKU: SA75H2-K1/Z3

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

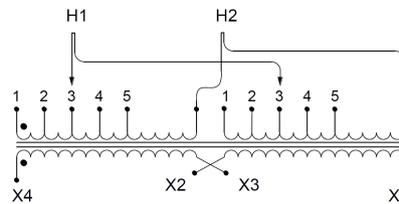

Single Phase Isolation Transformer with a capacity of 75kVA, transforming 440 Volts to 115/230 Volts



OFFICIAL QUOTE

75KVA 440 VOLTS TO 115/230 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	405 lbs
Phases	1
kVA	75
Connection	1Ph-2coil-5t-SD
Primary Voltage	440
Primary Max Current	170.45A
Primary Markings	H1-H2
Primary Terminals	300 MCM – 6
Secondary Voltage	115/230
Secondary Max Current	652.17A
Secondary Markings	X1-X2
Secondary Terminals	300 MCM – 6
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	98.50% (DOE 2016/NRCan 2019)
Impedance Range	4.0 – 6.0%
Sound (db)	50
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-7
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE

75KVA 440 VOLTS TO 115/230 VOLTS
SINGLE PHASE ISOLATION
TRANSFORMER



Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey