


OFFICIAL QUOTE

75KVA 575 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



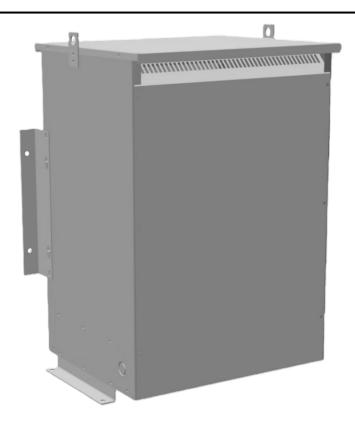

75KVA 575 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$5,488.49 CAD


Single Phase Isolation Transformer with a capacity of 75kVA, transforming 575 Volts to 220/440 Volts

SKU: SA75J1-L2/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 75kVA, transforming 575 Volts to 220/440 Volts



OFFICIAL QUOTE



75KVA 575 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	405 lbs
Phases	1
kVA	<u>75</u>
Connection	1Ph-2coil-5t-SD
Primary Voltage	<u>575</u>
Primary Max Current	130.43A
Primary Markings	H1-H2
Primary Terminals	<u>300 MCM - 6</u>
Secondary Voltage	220/440
Secondary Max Current	340.91A
Secondary Markings	<u>X1-X2</u>
Secondary Terminals	300 MCM - 6
Primary Taps	+/- 2 x 2.5%
Conductor Material	<u>Aluminum</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.50% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



75KVA 575 VOLTS TO 220/440 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey