


OFFICIAL QUOTE

75VA 230 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER



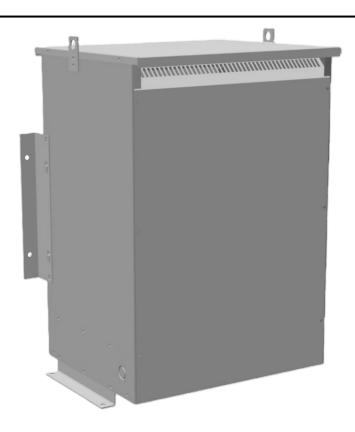

75VA 230 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

\$7,918.97 CAD

Three Phase Isolation Transformer with a capacity of 75kVA, transforming 230 Volts to 415Y/240 Volts

SKU: BA75C1-N2/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 75kVA, transforming 230 Volts to 415Y/240 Volts



OFFICIAL QUOTE



75VA 230 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	607 lbs
Phases	<u>3</u>
kVA	<u>75</u>
Connection	3Ph-DY-5T-SU
Primary Voltage	230
Primary Max Current	188.27A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	600 MCM - 2
Secondary Voltage	415Y/240
Secondary Max Current	<u>104.34A</u>
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	600 MCM - 2
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.50% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



75VA 230 VOLTS TO 415Y/240 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey