




**9KVA 380 VOLTS TO 208Y/120 VOLTS
THREE PHASE ISOLATION
TRANSFORMER**



Three Phase Isolation Transformer with a capacity of 9kVA, transforming 380 Volts to 208Y/120 Volts

Categories: [Isolation Transformers](#)

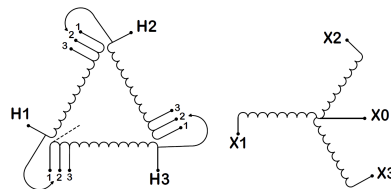

The quote is valid 30 days from 13 March 2026. The price does not include: "Special Features", freight and possible taxes. Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.



OFFICIAL QUOTE

9KVA 380 VOLTS TO 208Y/120 VOLTS THREE PHASE ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	132 lbs
Phases	3
kVA	9
Connection	3Ph-DY-3T-SD
Primary Voltage	380
Primary Max Current	13.67A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	208Y/120
Secondary Max Current	24.98A
Secondary Markings	X0-X1-X2-X3
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-4
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE

9KVA 380 VOLTS TO 208Y/120 VOLTS
THREE PHASE ISOLATION
TRANSFORMER



Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey