


OFFICIAL QUOTE

9KVA 380 VOLTS TO 440Y/254 VOLTS THREE PHASE ISOLATION TRANSFORMER



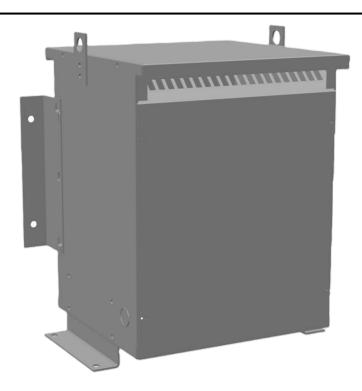

9KVA 380 VOLTS TO 440Y/254 VOLTS THREE PHASE ISOLATION TRANSFORMER


\$2,473.45 CAD


Three Phase Isolation Transformer with a capacity of 9kVA, transforming 380 Volts to 440Y/254 Volts

SKU: BC9F-P2

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 9kVA, transforming 380 Volts to 440Y/254 Volts



OFFICIAL QUOTE



9KVA 380 VOLTS TO 440Y/254 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	132 lbs
Phases	<u>3</u>
kVA	9
Connection	3Ph-DY-3T-SU
Primary Voltage	380
Primary Max Current	13.67A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	<u>440Y/254</u>
Secondary Max Current	11.81A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 1 x 5%
Conductor Material	<u>Copper</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>5.0 - 7.0%</u>
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-4
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	<u>150°C</u>



OFFICIAL QUOTE



9KVA 380 VOLTS TO 440Y/254 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey