





## MC225H-C

**\$8,541.00 CAD**

SKU: 2661bbcdf3c6

Categories: [Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

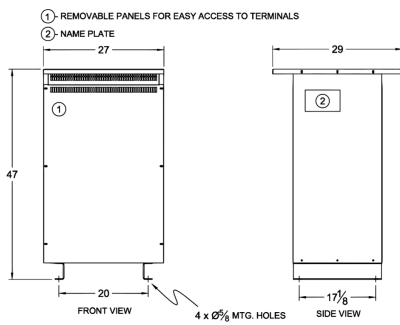

### PRODUCT SPECIFICATIONS

|               |          |
|---------------|----------|
| <b>Weight</b> | 680 lbs  |
| <b>Phases</b> | <u>1</u> |



|                                       |  |
|---------------------------------------|--|
| <b>kVA</b>                            | <a href="#">225</a>  |
| <b>Connection</b>                     | <a href="#">1PhA-NT-1</a>  |
| <b>Primary Voltage</b>                | <a href="#">480</a>  |
| <b>Primary Max Current</b>            | <a href="#">468.8A</a>   |
| <b>Primary Markings</b>               | <a href="#">H0-H1</a>  |
| <b>Primary Terminals</b>              | <a href="#">Pads</a>   |
| <b>Secondary Voltage</b>              | <a href="#">240</a>  |
| <b>Secondary Max Current</b>          | <a href="#">937.5A</a>   |
| <b>Secondary Markings</b>             | <a href="#">X0-X1</a>  |
| <b>Secondary Terminals</b>            | <a href="#">Pads</a>   |
| <b>Primary Taps</b>                   | <a href="#">N/A</a>  |
| <b>Conductor Material</b>             | <a href="#">Copper</a>   |
| <b>Insulation Class</b>               | <a href="#">220°C</a>  |
| <b>BIL (Insulation) Level</b>         | <a href="#">10kV</a>   |
| <b>Efficiency</b>                     | <a href="#">N/A</a>  |
| <b>Impedance</b>                      | <a href="#">2.5 – 4.5%</a>   |
| <b>Sound (db)</b>                     | <a href="#">50</a>   |
| <b>Enclosure Type</b>                 | <a href="#">NEMA 3R Indoor</a>   |
| <b>Enclosure</b>                      | <a href="#">E3R-8S</a>   |
| <b>Finish</b>                         | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>  |
| <b>Standards &amp; Certifications</b> | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |