



#### **OFFICIAL QUOTE**





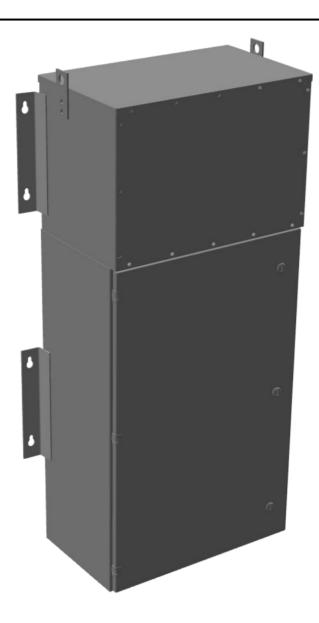


# 15KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER


\$10,939.00 CAD

SKU: MP3C15J-M

Categories: Mini Power Centers

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES







### **OFFICIAL QUOTE**



## 15KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER

### **PRODUCT SPECIFICATIONS**

PRODUCT SPECIFICATIONS		
Weight	475 lbs	
Phases	3	
kVA	<u>15</u>	
Connection	MPC3P-5t	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	Copper	
BIL (Insulation) Level	<u>10kV</u>	
Impedance Range	1.5 - 3.0%	
Enclosure Type	NEMA 3R Outdoor	
Enclosure Size	E3R-3PMPC-2	
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered	
Incoming Voltage	600	
Primary Breaker	<u>30A</u>	
Interruping Rating	14kAIC @ 600V	
Output Voltage	<u>208Y/120</u>	
Secondary Breaker	<u>50A</u>	
Short Circuit Withstand	10kAIC @ 240V	
Panel Board	Push-On	
Load Center Bus Material	Aluminum	
# of Circuits	27	
Circuit Breaker Suitability	Eaton Type BR	
Temperatue Rise	130°C	



### **OFFICIAL QUOTE**



## 15KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER

-	Insuation Class	200°C (Class N)
	Country/Manufacturer	Canada/RPM