




22.5KVA 600 VOLTS TO 208Y/120  
VOLTS THREE PHASE BOLT-ON  
BREAKER MINI POWER CENTER

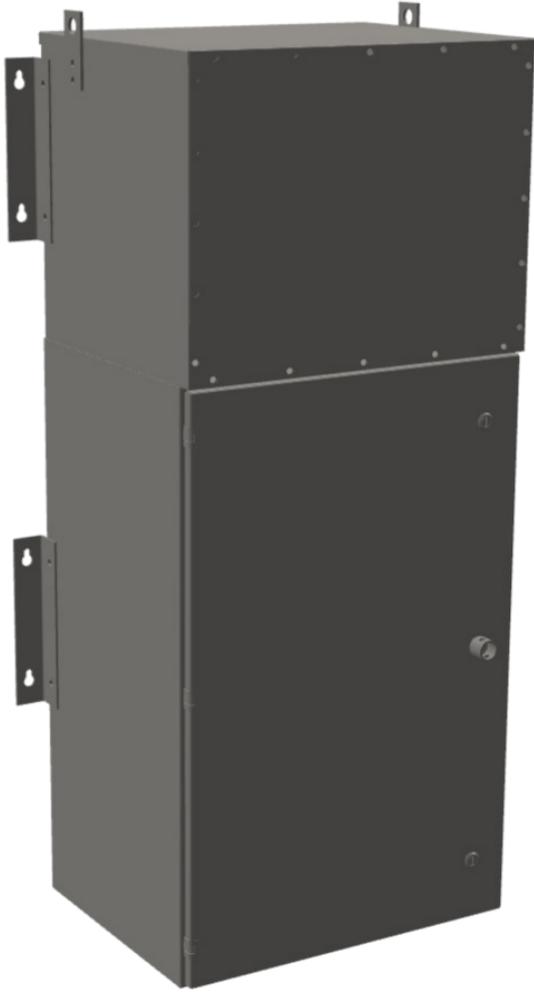


# 22.5KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE BOLT-ON BREAKER MINI POWER CENTER

**\$14,852.00 CAD**


SKU: MP3C22J-M/BO/CLC

Categories: [Mini Power Centers](#)

## SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



Ref	A	B	C	D	E	F	G	H
Dim (inches)	23.25	18	55	18.5	36.5	8	21.8	25.25





22.5KVA 600 VOLTS TO 208Y/120  
VOLTS THREE PHASE BOLT-ON  
BREAKER MINI POWER CENTER

PRODUCT SPECIFICATIONS

Weight	630 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">22.5</a>
Connection	<a href="#">MPC3P-5t</a>
Primary Taps	<a href="#">+/- 2 x 2.5%</a>
Conductor Material	<a href="#">Copper</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Impedance Range	<a href="#">1.5 – 3.0%</a>
Enclosure Type	<a href="#">NEMA 3R Outdoor</a>
Enclosure Size	<a href="#">E3R-3PMPC-3B</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered</a>
Incoming Voltage	<a href="#">600</a>
Primary Breaker	<a href="#">50A</a>
Interrupting Rating	<a href="#">14kAIC @ 600V</a>
Output Voltage	<a href="#">208Y/120</a>
Secondary Breaker	<a href="#">70A</a>
Short Circuit Withstand	<a href="#">10kAIC @ 240V</a>
Panel Board	<a href="#">Bolt-On</a>
Load Center Bus Material	<a href="#">Copper</a>
# of Circuits	<a href="#">30</a>
Circuit Breaker Suitability	<a href="#">Eaton Type BAB</a>
Temperatue Rise	<a href="#">130°C</a>
Insuation Class	<a href="#">200°C (Class N)</a>



OFFICIAL QUOTE

22.5KVA 600 VOLTS TO 208Y/120  
VOLTS THREE PHASE BOLT-ON  
BREAKER MINI POWER CENTER



Country/Manufacturer

[Canada/RPM](#)