




9KVA 480 VOLTS TO 208Y/120 VOLTS  
THREE PHASE PUSH-ON BREAKER  
MINI POWER CENTER

9KVA 480 VOLTS TO  
208Y/120 VOLTS THREE  
PHASE PUSH-ON BREAKER  
MINI POWER CENTER



**\$8,372.00 CAD**

SKU: MP3C9H-M

Categories: [Mini Power Centers](#)

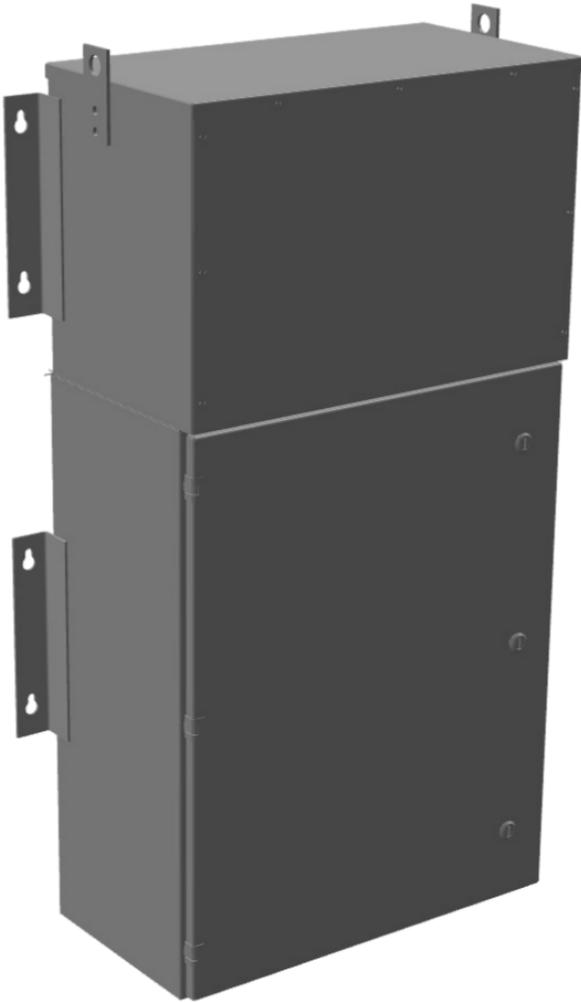

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





9KVA 480 VOLTS TO 208Y/120 VOLTS  
THREE PHASE PUSH-ON BREAKER  
MINI POWER CENTER

PRODUCT SPECIFICATIONS

Weight	315 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">9</a>
Connection	<a href="#">MPC3P-3t</a>
Primary Taps	<a href="#">+/- 1 x 5%</a>
Conductor Material	<a href="#">Copper</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Impedance Range	<a href="#">1.5 – 3.0%</a>
Enclosure Type	<a href="#">NEMA 3R Outdoor</a>
Enclosure Size	<a href="#">E3R-3PMPC-1</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered</a>
Incoming Voltage	<a href="#">480</a>
Primary Breaker	<a href="#">25A</a>
Interrupting Rating	<a href="#">14kAIC @ 480V</a>
Output Voltage	<a href="#">208Y/120</a>
Secondary Breaker	<a href="#">30A</a>
Short Circuit Withstand	<a href="#">10kAIC @ 240V</a>
Panel Board	<a href="#">Push-On</a>
Load Center Bus Material	<a href="#">Aluminum</a>
# of Circuits	<a href="#">12</a>
Circuit Breaker Suitability	<a href="#">Eaton Type BR</a>
Temperatue Rise	<a href="#">130°C</a>
Insuation Class	<a href="#">200°C (Class N)</a>



OFFICIAL QUOTE

9KVA 480 VOLTS TO 208Y/120 VOLTS  
THREE PHASE PUSH-ON BREAKER  
MINI POWER CENTER



Country/Manufacturer

[Canada/RPM](#)