




9KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE PUSH-ON BREAKER MINI POWER CENTER

\$8,573.00 CAD

SKU: MP3C9J-M

Categories: [Mini Power Centers](#)

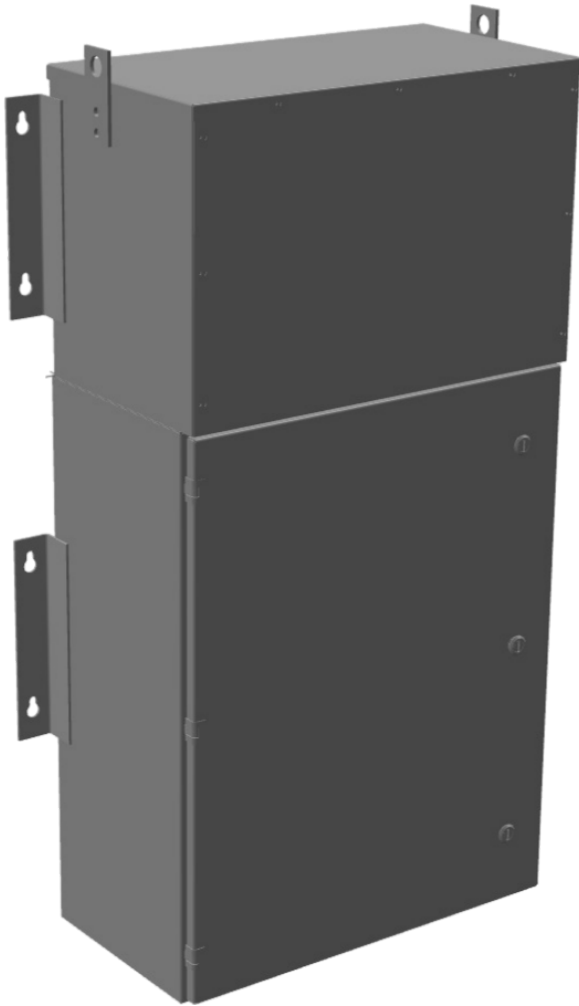

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





9KVA 600 VOLTS TO 208Y/120 VOLTS
THREE PHASE PUSH-ON BREAKER
MINI POWER CENTER

PRODUCT SPECIFICATIONS

Weight	315 lbs
Phases	3
kVA	9
Connection	MPC3P-3t
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
BIL (Insulation) Level	10kV
Impedance Range	1.5 – 3.0%
Enclosure Type	NEMA 3R Outdoor
Enclosure Size	E3R-3PMPC-1
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered
Incoming Voltage	600
Primary Breaker	20A
Interrupting Rating	14kAIC @ 600V
Output Voltage	208Y/120
Secondary Breaker	30A
Short Circuit Withstand	10kAIC @ 240V
Panel Board	Push-On
Load Center Bus Material	Aluminum
# of Circuits	12
Circuit Breaker Suitability	Eaton Type BR
Temperatue Rise	130°C
Insuation Class	200°C (Class N)



OFFICIAL QUOTE

9KVA 600 VOLTS TO 208Y/120 VOLTS
THREE PHASE PUSH-ON BREAKER
MINI POWER CENTER



Country/Manufacturer

[Canada/RPM](#)