


OFFICIAL QUOTE

MP3C15H-M/BO/CLC



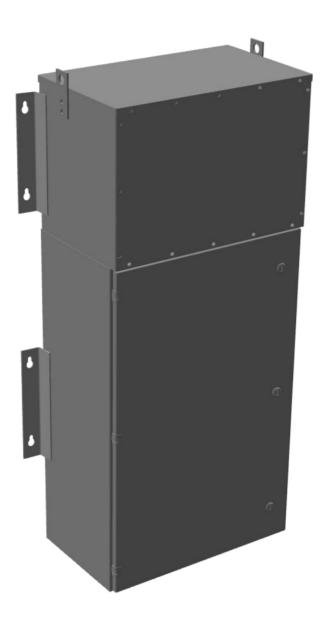


MP3C15H-M/BO/CLC


\$12,613.00 CAD

SKU: 2128cde6b303

Categories: Mini Power Centers

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES







OFFICIAL QUOTE MP3C15H-M/BO/CLC



PRODUCT SPECIFICATIONS

| Weight | 475 lbs |
|-----------------------------|--|
| Phases | <u>3</u> |
| Circuit Breaker Suitability | Eaton Type BAB |
| kVA | <u>15</u> |
| Connection | MPC3P-5t |
| Incoming Voltage | 480 |
| Primary Breaker | <u>40A</u> |
| Interruping Rating | 14kAIC @ 480V |
| Output Voltage | <u>208Y/120</u> |
| Secondary Breaker | <u>50A</u> |
| Short Circuit Withstand | 10kAIC @ 240V |
| Primary Taps | +/- 2 x 2.5% |
| Conductor Material | <u>Copper</u> |
| Insuation Class | 200°C |
| Panel Board | Bolt-On |
| Load Center Bus Material | <u>Copper</u> |
| # of Circuits | <u>30</u> |
| Impedance | 1.5 - 3.0% |
| Temperatue Rise | <u>130°C</u> |
| Enclosure | E3R-3PMPC-2B |
| Enclosure Type | E3R Outdoor |
| Finish | Polyster Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, ISO 9001:2015 Registered |