


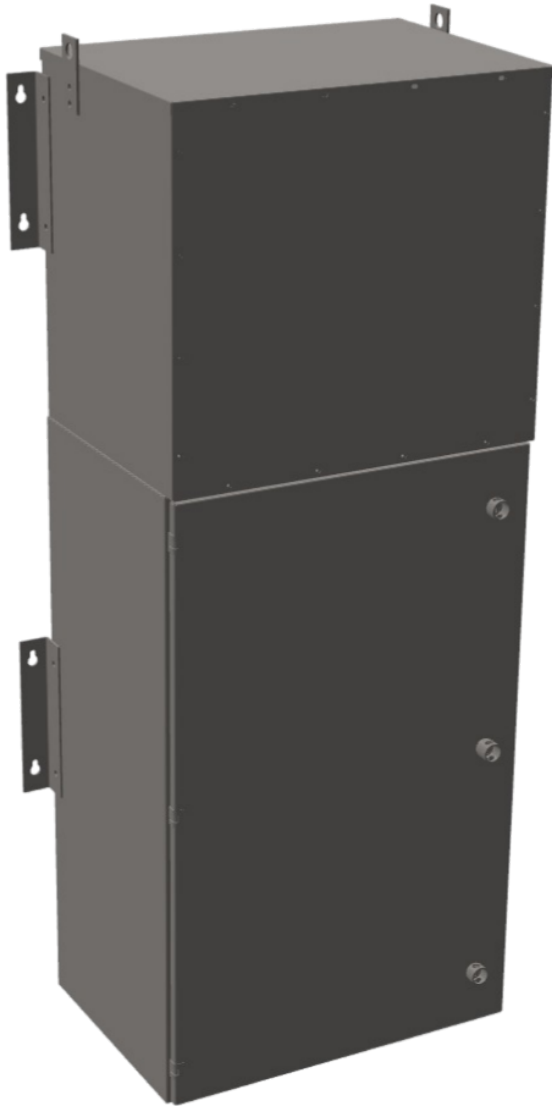


## MP3C45J-M

### \$18,947.00 CAD


SKU: 1df2a68734cb

Categories: [Mini Power Centers](#)

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



| Ref          | A    | B  | C    | D    | E    | F | G    | H    |
|--------------|------|----|------|------|------|---|------|------|
| Dim (inches) | 25.5 | 18 | 65.5 | 23.6 | 41.9 | 8 | 29.5 | 27.6 |





## PRODUCT SPECIFICATIONS

|                             |                                                                                                      |
|-----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                      | 960 lbs                                                                                              |
| Phases                      | <a href="#">3</a>                                                                                    |
| Circuit Breaker Suitability | <a href="#">Eaton Type BR</a>                                                                        |
| kVA                         | <a href="#">45</a>                                                                                   |
| Connection                  | <a href="#">MPC3P-5t</a>                                                                             |
| Incoming Voltage            | <a href="#">600</a>                                                                                  |
| Primary Breaker             | <a href="#">90A</a>                                                                                  |
| Interrupting Rating         | <a href="#">14kAIC @ 600V</a>                                                                        |
| Output Voltage              | <a href="#">208Y/120</a>                                                                             |
| Secondary Breaker           | <a href="#">150A</a>                                                                                 |
| Short Circuit Withstand     | <a href="#">25kAIC @ 240V</a>                                                                        |
| Primary Taps                | <a href="#">+/- 2 x 2.5%</a>                                                                         |
| Conductor Material          | <a href="#">Copper</a>                                                                               |
| Insuation Class             | <a href="#">200°C</a>                                                                                |
| Panel Board                 | <a href="#">Push-On</a>                                                                              |
| Load Center Bus Material    | <a href="#">Aluminum</a>                                                                             |
| # of Circuits               | <a href="#">30</a>                                                                                   |
| Impedance                   | <a href="#">1.5 – 3.0%</a>                                                                           |
| Temperatue Rise             | <a href="#">130°C</a>                                                                                |
| Enclosure                   | <a href="#">E3R-3PMPC-4</a>                                                                          |
| Enclosure Type              | <a href="#">E3R Outdoor</a>                                                                          |
| Finish                      | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>                                              |
| Standards & Certifications  | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered</a> |