


OFFICIAL QUOTE

MP3C9H-M



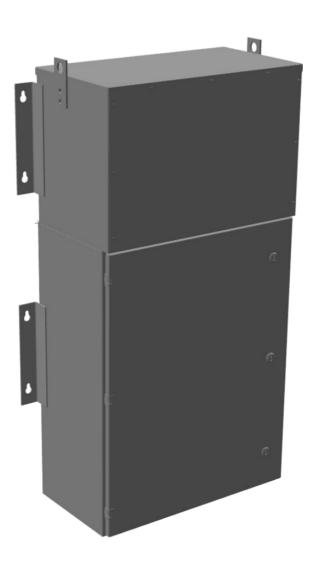


MP3C9H-M


\$8,372.00 CAD

SKU: 1e8eee0036bd

Categories: Mini Power Centers

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES







OFFICIAL QUOTE

MP3C9H-M



PRODUCT SPECIFICATIONS

Weight	315 lbs
Phases	<u>3</u>
Circuit Breaker Suitability	Eaton Type BR
kVA	9
Connection	MPC3P-3t
Incoming Voltage	480
Primary Breaker	25A
Interruping Rating	14kAIC @ 480V
Output Voltage	<u>208Y/120</u>
Secondary Breaker	<u>30A</u>
Short Circuit Withstand	10kAIC @ 240V
Primary Taps	+/- 1 x 5%
Conductor Material	Copper
Insuation Class	200°C
Panel Board	Push-On
Load Center Bus Material	Aluminum
# of Circuits	12
Impedance	1.5 - 3.0%
Temperatue Rise	130°C
Enclosure	E3R-3PMPC-1
Enclosure Type	E3R Outdoor
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E495724, ISO 9001:2015 Registered