

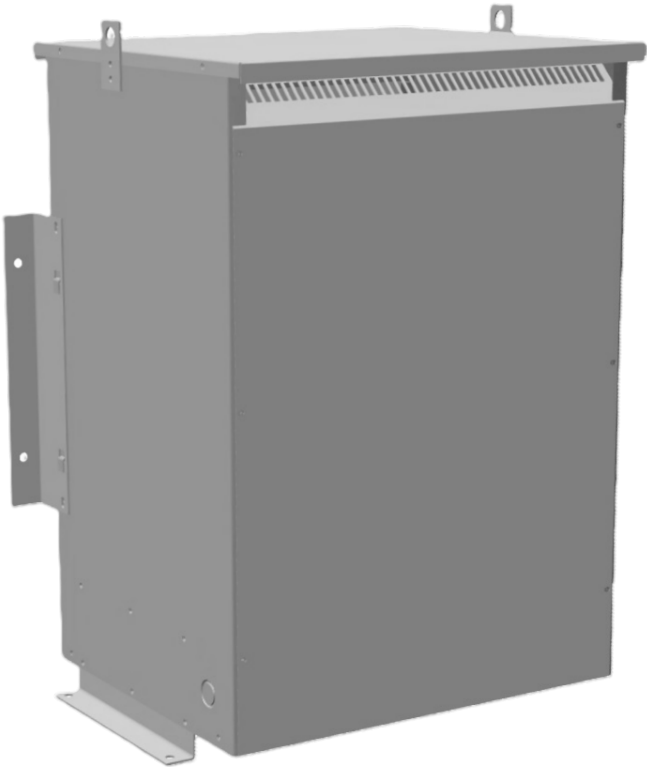




RC112J-C  
\$5,334.99 USD

SKU: dd70ab655d73  
Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

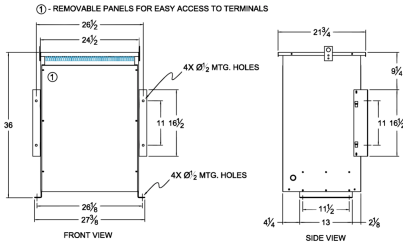

PRODUCT SPECIFICATIONS

|        |                       |
|--------|-----------------------|
| Weight | 480 lbs               |
| Phases | <a href="#">3</a>     |
| kVA    | <a href="#">112.5</a> |



|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Connection                 | <a href="#">3PhA-NT-1</a>                                                                            |
| Primary Voltage            | <a href="#">600</a>                                                                                  |
| Primary Max Current        | <a href="#">108.3A</a>                                                                               |
| Primary Markings           | <a href="#">H1-H2-H3</a>                                                                             |
| Primary Terminals          | <a href="#">300MCM-6</a>                                                                             |
| Secondary Voltage          | <a href="#">240</a>                                                                                  |
| Secondary Max Current      | <a href="#">270.6A</a>                                                                               |
| Secondary Markings         | <a href="#">X1-X2-X3</a>                                                                             |
| Secondary Terminals        | <a href="#">Pads</a>                                                                                 |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Insuation Class            | <a href="#">220°C</a>                                                                                |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency                 | <a href="#">N/A</a>                                                                                  |
| Impedance                  | <a href="#">1.5 – 3.5%</a>                                                                           |
| Sound (db)                 | <a href="#">45</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>                                                                       |
| Enclosure                  | <a href="#">E3R-7</a>                                                                                |
| Finish                     | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>                                              |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |