



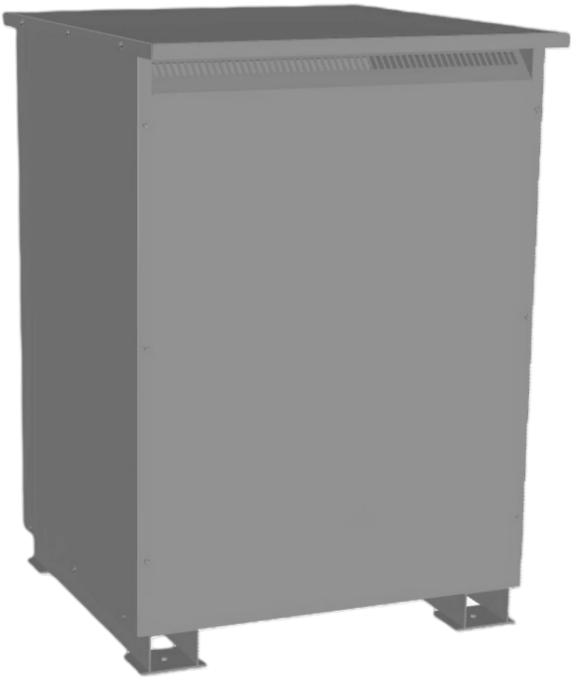


# RC225J-C

## \$12,263.00 CAD

SKU: 3e0e947bbe1c  
Categories: [Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

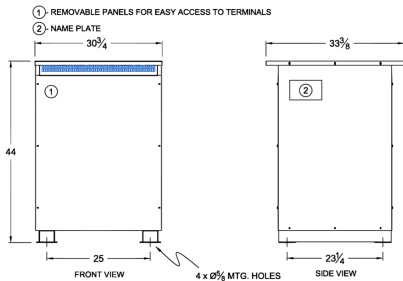

### PRODUCT SPECIFICATIONS

|            |                           |
|------------|---------------------------|
| Weight     | 1020 lbs                  |
| Phases     | <a href="#">3</a>         |
| kVA        | <a href="#">225</a>       |
| Connection | <a href="#">3PhA-NT-1</a> |



|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Primary Voltage            | <a href="#">600</a>                                                                                  |
| Primary Max Current        | <a href="#">216.5A</a>                                                                               |
| Primary Markings           | <a href="#">H1-H2-H3</a>                                                                             |
| Primary Terminals          | <a href="#">600MCM-2</a>                                                                             |
| Secondary Voltage          | <a href="#">240</a>                                                                                  |
| Secondary Max Current      | <a href="#">541.3A</a>                                                                               |
| Secondary Markings         | <a href="#">X1-X2-X3</a>                                                                             |
| Secondary Terminals        | <a href="#">Pads</a>                                                                                 |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Insuation Class            | <a href="#">220°C</a>                                                                                |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency                 | <a href="#">N/A</a>                                                                                  |
| Impedance                  | <a href="#">1.5 – 3.5%</a>                                                                           |
| Sound (db)                 | <a href="#">50</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>                                                                       |
| Enclosure                  | <a href="#">E3R-8</a>                                                                                |
| Finish                     | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>                                              |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |