


OFFICIAL QUOTE

RC75H-B/EP



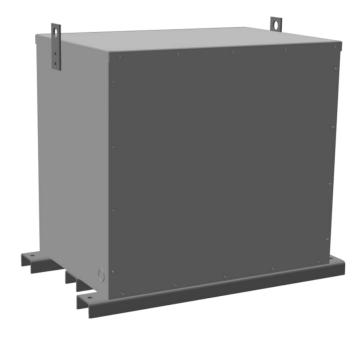


RC75H-B/EP


\$6,047.16 USD

SKU: 3c7c3e950d76

Categories: Encapsulated Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

Weight	830 lbs
Phases	3
kVA	<u>75</u>
Connection	<u>3PhA-NT-1</u>
Primary Voltage	480



OFFICIAL QUOTE

RC75H-B/EP



Primary Max Current	90.2A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	#2/0-6 AWG
Secondary Voltage	208
Secondary Max Current	<u>208.2A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>300MCM-6</u>
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insuation Class	200°C
BIL (Insulation) Level	<u>10kV</u>
Impedance	<u>0.5 – 1.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure	E3R-3PEP-6
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered