



RC75J-H/EP

\$3,836.00 CAD

SKU: 7c2e6b2efe9b

Categories: [Encapsulated Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

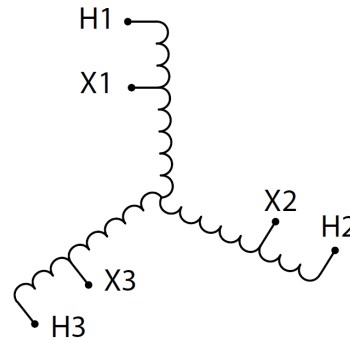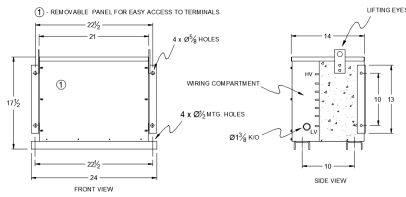

PRODUCT SPECIFICATIONS

| | |
|----------------------------|---------------------------|
| Weight | 560 lbs |
| Phases | 3 |
| kVA | 75 |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 600 |
| Primary Max Current | 72.2A |



| | |
|---------------------------------------|--|
| Primary Markings | H1-H2-H3 |
| Primary Terminals | #2/0-6 AWG |
| Secondary Voltage | 480 |
| Secondary Max Current | 90.2A |
| Secondary Markings | X1-X2-X3 |
| Secondary Terminals | #2/0-6 AWG |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insuation Class | 200°C |
| BIL (Insulation) Level | 10kV |
| Impedance | 0.5 – 1.5% |
| Sound (db) | 45 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | E3R-3PEP-4 |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |