RS125G1

$2,221.00 CAD

SKU: b683afb4f414
Categories: Motor Starters

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

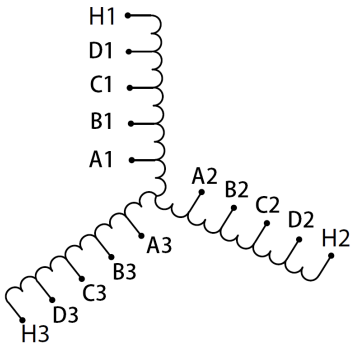

PRODUCT SPECIFICATIONS

Weight	170 lbs
Phases	3
HP	125
Connection	3PhA-ST-0-3
Primary Voltage	400
Primary Max Current	180.4A

The quote is valid 30 days from 18 April 2025. The price does not include: "Special Features", freight and possible taxes.
Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.

Primary Markings	H1-H2-H3
Primary Terminals	Pads
Secondary Voltage	50/65/80/100%
Secondary Max Current	1443.4A
Secondary Markings	A-B-C-D
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	150°C
Insuation Class	220°C
BIL (Insulation) Level	10kV
Efficiency	N/A
Impedance	N/A
Sound (db)	N/A
Enclosure Type	Core & Coil
Enclosure	N/A
Finish	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered