RS20J

$702.00 CAD

SKU: 0f9c3c2aa72b
Categories: Motor Starters

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

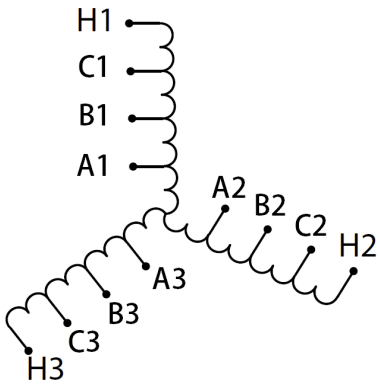

PRODUCT SPECIFICATIONS

Weight	50 lbs
Phases	3
HP	20
Enclosure	Core & Coil
Connection	3PhA-ST-0-2
Primary Voltage	600

Primary Max Current	19.2A
Primary Markings	H1-H2-H3
Primary Terminals	Large Scews
Secondary Voltage	65/80/100%
Secondary Max Current	177.6A
Secondary Markings	A-B-C
Secondary Terminals	Large Scews
Primary Taps	N/A
Conductor Material	Copper
Insuation Class	220
BIL (Insulation) Level	10kV
Efficiency	N/A
Impedance	N/A
Sound (db)	N/A
Enclosure Type	N/A