RS250J

$2,691.00 CAD

SKU: 96a06695c1d4
Categories: Motor Starters

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

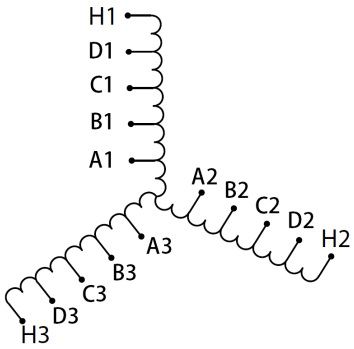

PRODUCT SPECIFICATIONS

Weight	275 lbs
Phases	3
HP	250
Connection	3PhA-ST-0-3
Primary Voltage	600
Primary Max Current	240.6A
Primary Markings	H1-H2-H3

Primary Terminals	Pads
Secondary Voltage	50/65/80/100%
Secondary Max Current	2886.8A
Secondary Markings	A-B-C-D
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Insuation Class	220
BIL (Insulation) Level	10kV
Efficiency	N/A
Impedance	N/A
Sound (db)	N/A
Enclosure Type	N/A