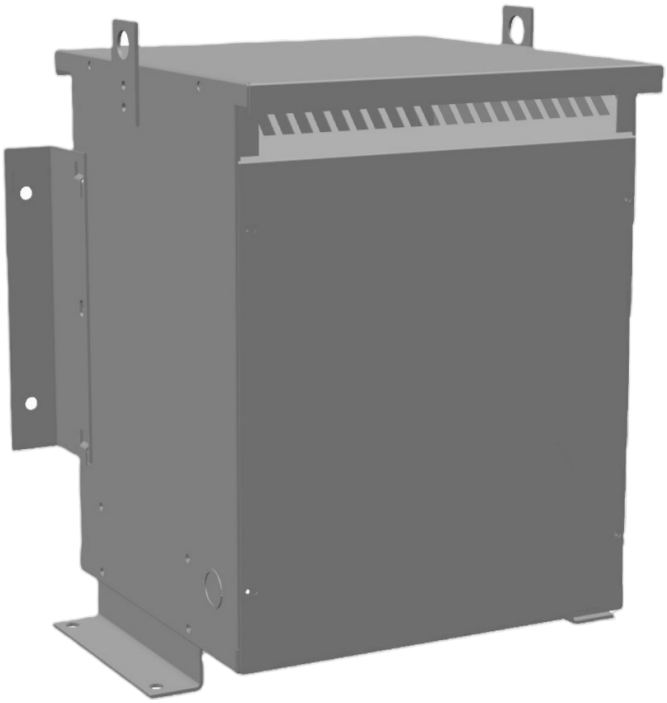

SA15J-K/Z3

$1,855.00 CAD

SKU: 794957c4f07e
Categories: Isolation Transformers

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

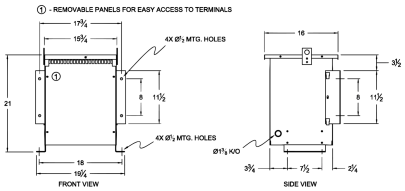

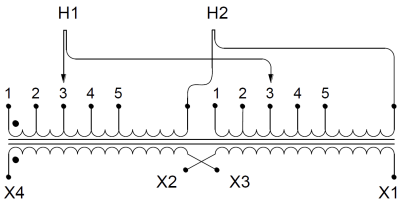

PRODUCT SPECIFICATIONS

Weight	145 lbs
Phases	1
kVA	15
Connection	1Ph-2coil-5t-SD
Primary Voltage	600
Primary Max Current	25A
Primary Markings	H1-H2

The quote is valid 30 days from 19 April 2025. The price does not include: "Special Features", freight and possible taxes.
Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.

Primary Terminals	#2-14 AWG
Secondary Voltage	120/240
Secondary Max Current	125A
Secondary Markings	X1-X3-X2-X4
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
Insuation Class	220°C
BIL (Insulation) Level	10kV
Impedance	4.0 – 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure	E3R-4
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Efficiency	97.70%