


OFFICIAL QUOTE

SA15J-K2/Z3



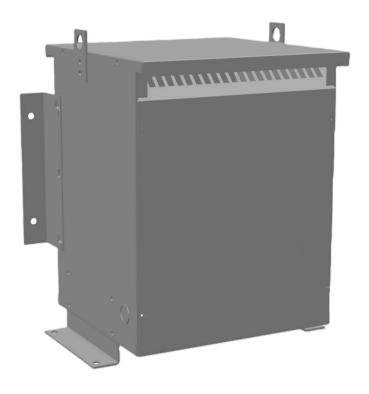

SA15J-K2/Z3


\$1,366.15 USD

SKU: 01236e94a612

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

| Weight | 145 lbs |
|---------------------|-----------------|
| Phases | 1 |
| kVA | <u>15</u> |
| Connection | 1Ph-2coil-5t-SD |
| Primary Voltage | 600 |
| Primary Max Current | 25A |
| Primary Markings | H1-H2 |



OFFICIAL QUOTE

SA15J-K2/Z3



| Primary Terminals | #2-14 AWG |
|----------------------------|--|
| Secondary Voltage | 110/220 |
| Secondary Max Current | <u>136.4A</u> |
| Secondary Markings | <u>X1-X3-X2-X4</u> |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | <u>+/- 2 x 2.5%</u> |
| Conductor Material | <u>Aluminum</u> |
| Insuation Class | 220°C |
| BIL (Insulation) Level | <u>10kV</u> |
| Impedance | 4.0 - 6.0% |
| Sound (db) | 45 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | <u>E3R-4</u> |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Efficiency | 97.70% |