

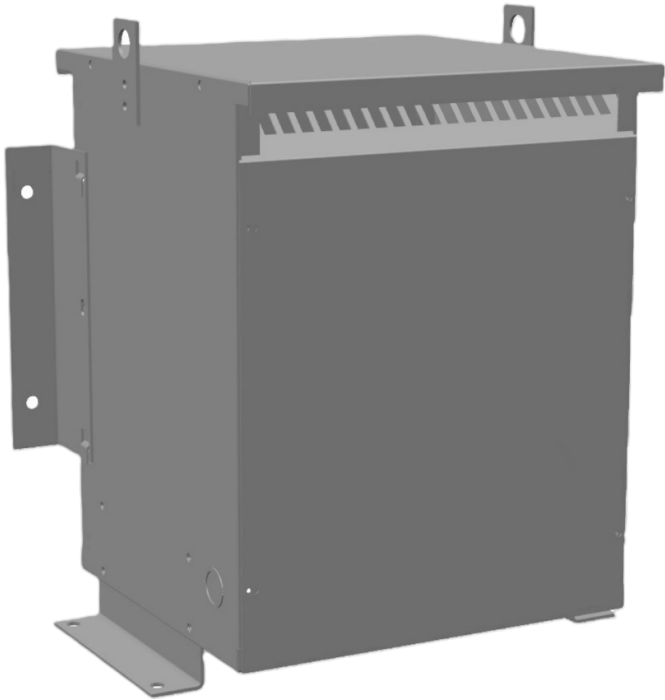


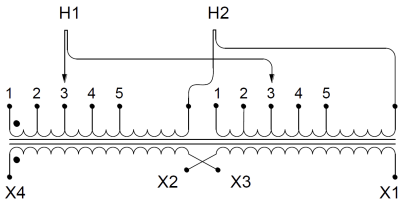

SC15B-K2/Z3  
\$1,864.00 CAD


SKU: d7e17296853e  
Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

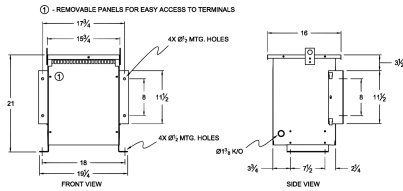

PRODUCT SPECIFICATIONS

|                     |                                 |
|---------------------|---------------------------------|
| Weight              | 160 lbs                         |
| Phases              | <a href="#">1</a>               |
| kVA                 | <a href="#">15</a>              |
| Connection          | <a href="#">1Ph-2coil-5t-SD</a> |
| Primary Voltage     | <a href="#">208</a>             |
| Primary Max Current | <a href="#">72.1A</a>           |
| Primary Markings    | <a href="#">H1-H2</a>           |



|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Primary Terminals          | <a href="#">#2-14 AWG</a>                                                                            |
| Secondary Voltage          | <a href="#">110/220</a>                                                                              |
| Secondary Max Current      | <a href="#">136.4A</a>                                                                               |
| Secondary Markings         | <a href="#">X1-X3-X2-X4</a>                                                                          |
| Secondary Terminals        | <a href="#">#2-14 AWG</a>                                                                            |
| Primary Taps               | <a href="#">+/- 2 x 2.5%</a>                                                                         |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Insulation Class           | <a href="#">220°C</a>                                                                                |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Impedance                  | <a href="#">4.0 – 6.0%</a>                                                                           |
| Sound (db)                 | <a href="#">45</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>                                                                       |
| Enclosure                  | <a href="#">E3R-4</a>                                                                                |
| Finish                     | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>                                             |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |
| Efficiency                 | <a href="#">97.70%</a>                                                                               |