




## SC1H-K/EP


**\$407.27 USD**

SKU: c1a78ebb86c2

Categories: [Encapsulated Isolation Transformer](#)

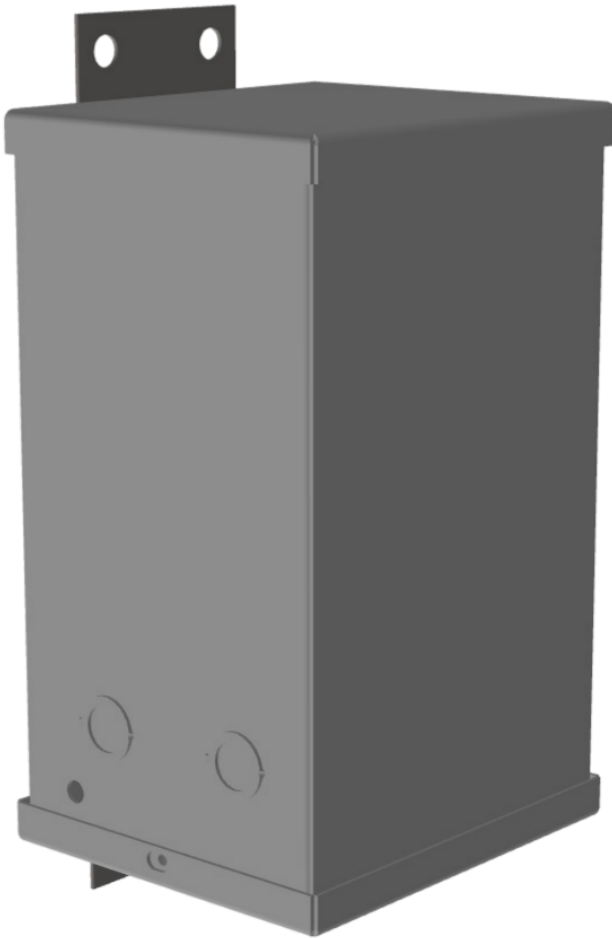

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

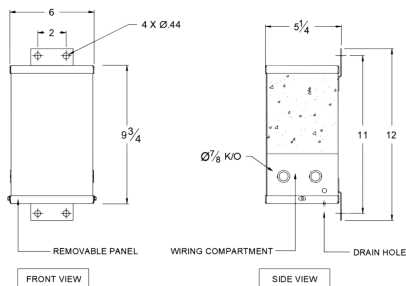

### PRODUCT SPECIFICATIONS

|        |        |
|--------|--------|
| Weight | 30 lbs |
|--------|--------|



|                            |  |
|----------------------------|--|
| Phases                     | <a href="#">1</a>  |
| kVA                        | <a href="#">1</a>  |
| Connection                 | <a href="#">1Ph-1coil-NT-SD</a>  |
| Primary Voltage            | <a href="#">480</a>  |
| Primary Max Current        | <a href="#">2.1A</a>   |
| Primary Markings           | <a href="#">H1-H2</a>  |
| Primary Terminals          | <a href="#">Leads</a>  |
| Secondary Voltage          | <a href="#">120/240</a>  |
| Secondary Max Current      | <a href="#">8.3A</a>   |
| Secondary Markings         | <a href="#">X1-X3-X2-X4</a>  |
| Secondary Terminals        | <a href="#">Leads</a>  |
| Primary Taps               | <a href="#">N/A</a>  |
| Conductor Material         | <a href="#">Copper</a>   |
| Temperatue Rise            | <a href="#">115°C</a>  |
| Insuation Class            | <a href="#">180°C</a>  |
| BIL (Insulation) Level     | <a href="#">10kV</a>   |
| Efficiency                 | <a href="#">N/A</a>  |
| Impedance                  | <a href="#">1.5 – 3.5%</a>   |
| Sound (db)                 | <a href="#">40</a>   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>   |
| Enclosure                  | <a href="#">E3R-1PEP-2</a>   |
| Finish                     | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>  |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |