


## **OFFICIAL QUOTE**

SC15B-J/Z3



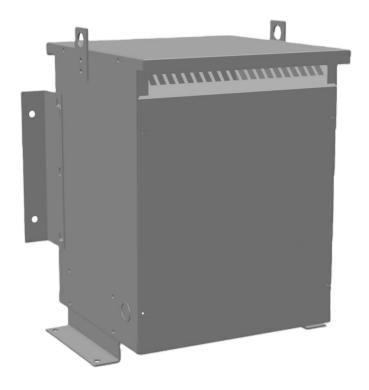


# **SC15B-J/Z3**


\$1,854.00 CAD

**SKU:** 5775eee981f2

**Categories:** <u>Isolation Transformers</u>

### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





# **PRODUCT SPECIFICATIONS**

| Weight              | 160 lbs         |
|---------------------|-----------------|
| Phases              | 1               |
| kVA                 | <u>15</u>       |
| Connection          | 1Ph-2coil-5T-SU |
| Primary Voltage     | 208             |
| Primary Max Current | 72.1A           |



## **OFFICIAL QUOTE**

### SC15B-J/Z3



| Primary Markings           | <u>X1-X2</u>   |
|----------------------------|--|
| Primary Terminals          | #2-14 AWG  |
| Secondary Voltage          | 600  |
| Secondary Max Current      | <u>25A</u>   |
| Secondary Markings         | <u>H1-H2</u>   |
| Secondary Terminals        | #2-14 AWG  |
| Primary Taps               | <u>+/- 2 x 2.5%</u>  |
| Conductor Material         | <u>Copper</u>  |
| Insuation Class            | 220°C  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Impedance                  | 4.0 - 6.0%   |
| Sound (db)                 | <u>45</u>  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure                  | <u>E3R-4</u>   |
| Finish                     | Polyster Powder Coat – ANSI/ASA 61 Grey  |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Efficiency                 | 97.70%   |