


#### **OFFICIAL QUOTE**

### 3KVA 416 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER



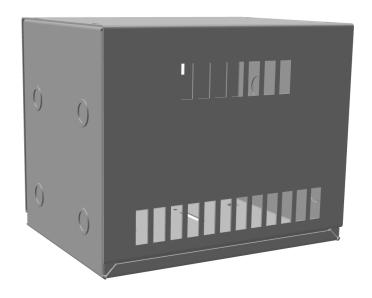

# 3KVA 416 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$768.20 CAD

Single Phase Autotransformer with a capacity of 3kVA, transforming 416 Volts to 240 Volts

SKU: MC3G-C

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Single Phase Autotransformer with a capacity of 3kVA, transforming 416 Volts to 240 Volts



#### **OFFICIAL QUOTE**



## 3KVA 416 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 56 lbs   |
| Phases                     | 1  |
| kVA                        | <u>3</u>   |
| Connection                 | 1PhA-NT-1  |
| Primary Voltage            | 416  |
| Primary Max Current        | <u>4.2A</u>  |
| Primary Markings           | <u>H0-H1</u>   |
| Primary Terminals          | Terminal Blocks  |
| Secondary Voltage          | 240  |
| Secondary Max Current      | <u>7.2A</u>  |
| Secondary Markings         | <u>X0-X1</u>   |
| Secondary Terminals        | Terminal Blocks  |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 180°C (Class F)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | 1.5 - 3.5%   |
| Sound (db)                 | 40 dB  |
| Enclosure Type             | NEMA 1   |
| Enclosure Size             | <u>E1-0</u>  |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



#### **OFFICIAL QUOTE**

## 3KVA 416 VOLTS TO 240 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|