




**6KVA 480 VOLTS TO 208 VOLTS
THREE PHASE ENCAPSULATED
AUTOTRANSFORMER**

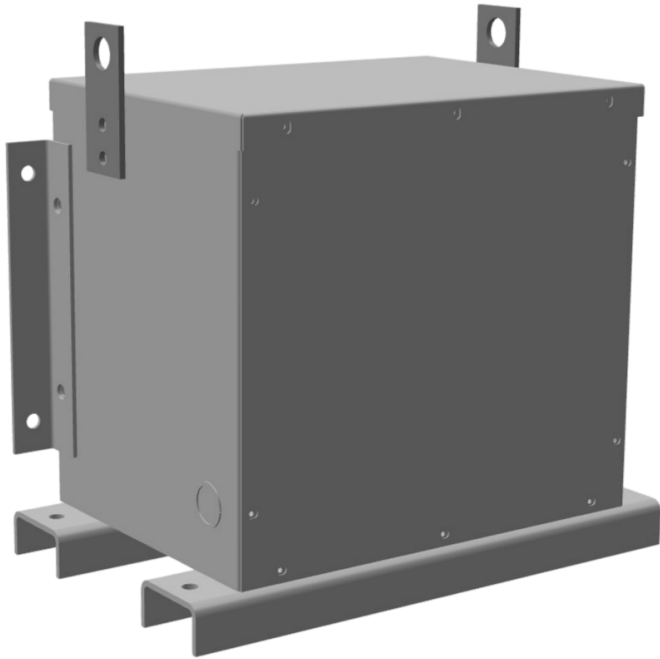

**6KVA 480 VOLTS TO 208
VOLTS THREE PHASE
ENCAPSULATED
AUTOTRANSFORMER**



\$1,232.24 USD

Three Phase Encapsulated Autotransformer with a capacity of 6kVA, transforming 480Y Volts to 208Y Volts

SKU: RC6H-B/EP

Categories: [Encapsulated Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

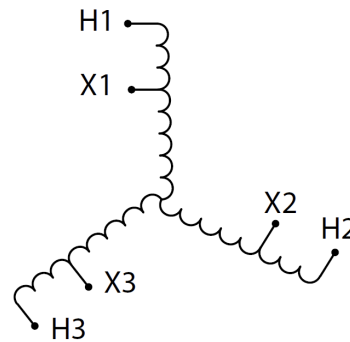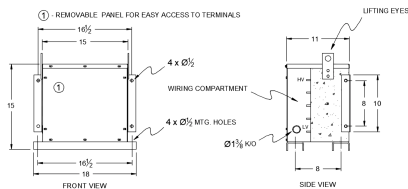

Three Phase Encapsulated Autotransformer with a capacity of 6kVA, transforming 480Y Volts to 208Y Volts



PRODUCT SPECIFICATIONS

| | |
|----------------------------|--|
| Weight | 260 lbs |
| Phases | 3 |
| kVA | 6 |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 480 |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | #2-14 AWG |
| Secondary Voltage | 208 |
| Secondary Markings | X1-X2-X3 |
| Secondary Terminals | #2-14 AWG |
| Primary Taps | N/A |
| Conductor Material | Copper |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 0.5 – 1.5% |
| Sound (db) | 40 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-3PEP-2 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | 130°C |
| Insuation Class | 200°C (Class N) |