



**25VA 120/240 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER**



25VA 120/240 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$107.38 CAD



Single Phase Control Transformer with a capacity of 25VA, transforming 120/240 Volts to 240/480 Volts

SKU: CS25K-L

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions				Mounting Slot Ø x L	Mounting Slot	
	A	B	C	D			
25	3	4	2.5	2.5	2.5	1.13	0.25 x 0.625
50	3	4	2.5	2.5	2.5	1.13	0.25 x 0.625
100	3	4	2.5	2.5	3	1.375	0.25 x 0.625
150	3.75	4.25	3.13	3.25	3.5	4.5	0.25 x 0.625
200	3.75	4.5	3.13	3.25	3.5	4.5	0.25 x 0.625
250	3.75	5	3.13	3.25	3.5	4.5	0.31 x 0.625
350	4.5	5	3.75	3.75	3.75	4.75	0.31 x 0.625
500	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625
750	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625
1000	6.5	6.75	5.63	5.75	4.25	5.25	0.31 x 0.625
1500	6.75	7.25	5.63	5	3.75	5.25	0.31 x 0.625
2000	7.5	7.5	6.25	6	4.25	5.25	0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	6.5	0.31 x 0.625
4000	9	10	8	7	7	8	0.44 x 0.825

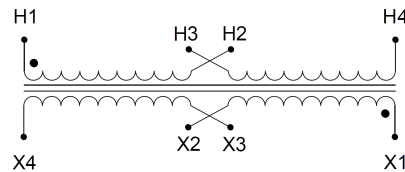

Single Phase Control Transformer with a capacity of 25VA, transforming 120/240 Volts to 240/480 Volts



PRODUCT SPECIFICATIONS

Weight	12 lbs
Phases	1
Connection	1Ph-CT-DD-SU
Primary Voltage	120/240
Primary Max Current	0.21A
Primary Markings	X1-X2-X3-X4
Primary Terminals	Terminals
Secondary Voltage	240/480
Secondary Max Current	0.1A
Secondary Markings	H1-H2-H3-H4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	80°C
Insuation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

25VA 120/240 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER



VA	
Country/Manufacturer	Canada/RPM